












Technical Data ALGAE

Composition Composición	100% Solution Dyed Acrylic 100% Acrílico tintado en masa
Weight Peso	780 g/m ² 23 oz/yd ²
Width Ancho	160 cm 63"
Rapport	70x80 cm 31x31.5"
Length of Roll Longitud de las piezas	20 ml 21.8 yd
Finish Acabado	 Water Repellent Hidrófugo  Anti-Stain Antimanchas  Eco-Shield No PFAS  Ultra Soft Ultra Suave
Colour Fastness to Light Solidez del color a la luz	7-8/8 UNE EN ISO 105-B02:2014 Método 2
Colour Fastness to Artificial Weathering Solidez del color a la interperie artificial	7/8 UNE EN ISO 105-B04:1997
Colour Fastness to Rubbing Solidez del color al frote	4-5/5 UNE EN ISO 105-X12:2016
Colour Fastness to Chlorinated Water Solidez del color al agua clorada	5/5 UNE EN ISO 105-E03:2010
Ultraviolet Protection Factor UPF Factor de protección ultravioleta UPF	50+ AZ/NZS 4399/2017
Spray Test	4/5 EN ISO 4920:2012
Tear Resistance Resistencia al desgarro	Warp Urdimbre 371 N Weft Trama 356 N UNE EN ISO 13937-2:2000
Slippage Resistance Deslizamiento a la costura	Warp Urdimbre 1,5 N Weft Trama 2 N UNE EN ISO 13936-2:2004 - 6mm
Tensile Strength Resistencia a la tracción	Warp Urdimbre 3,6 N Weft Trama 4,1 N UNE EN ISO 13934-1:2013
Resistance to Pilling Resistencia al pilling	3-4/5 UNE EN ISO 12945-2
Abrasion Resistance (Martindale) Resistencia a la abrasión (Martindale)	18000 UNE EN ISO 12497-2:2016
Shrinkage to Washing Encogimiento al lavado	Warp Urdimbre -2% Weft Trama -1% UNE EN ISO 5077:2008
Flammability Inflamabilidad	UNE 1021 PART 1 BS 5852-0 Cigarette Test Cal 117, NFPA 260
Cleaning Instructions Manutención	    

Uses
Usos



Qualities
Cualidades

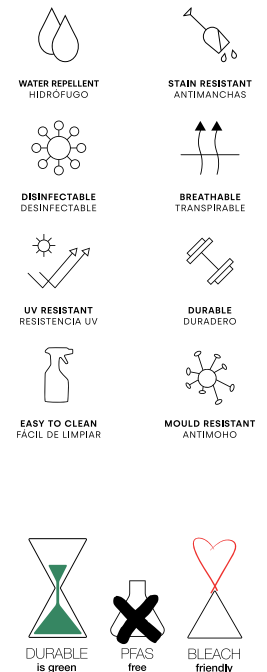

Sensitive values of tolerance +/- 5%. Valores susceptibles de tolerancia de +/- 5%

5 YEARS WARRANTY
The Agora warranty covers the fabric becoming unserviceable as a result of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemicals, when properly installed, used and maintained. The warranty does not cover labour and installation costs supplied by the dealer. The warranty neither applies against deterioration of any kind due to abusive use, accidental burns, negligence or perforations.
La garantía Agora cubre un anormal deterioro del tejido debido a la pérdida de color o resistencia siempre que existan unas condiciones de exposición normales, incluyendo el sol, moho, putrefacción y químicos de la atmósfera en general, siempre y cuando el tejido haya sido instalado, utilizado y mantenido correctamente. La garantía no cubre los trabajos de instalación del distribuidor. La garantía tampoco cubre, en cualquier caso, el deterioro debido al uso abusivo, quemaduras accidentales, negligencia o perforación.