



Composition Composición	100% Solution Dyed Acrylic 100% Acrílico tintado en masa
Weight Peso	445 g/m ² 13.1 oz/y ²
Width Ancho	160 cm 63"
Length of Roll Longitud de las piezas	50 m 54.7 yd
Finish Acabado	 Water Repellent Hidrófugo  Anti-Stain Antimanchas  Eco-Shield No PFAs
Colour Fastness to Light Solidez del color a la luz	7-8/8 UNE EN ISO 105-B02:2014
Colour Fastness to Artificial Weathering Solidez del color a la interperie artificial	7-8/8 UNE EN ISO 105-B04:1998
Colour Fastness to Rubbing Solidez del color al frote	4-5/5 UNE EN ISO 105-X12:2016
Colour Fastness to Chlorinated Water Solidez del color al agua clorada	5/5 UNE EN ISO 105-E03:2010
Ultraviolet Protection Factor UPF Factor de protección ultravioleta UPF	80+ AZ/NZS 4399/1996
Spray Test	4/5 UNE EN ISO 24920
Tear Resistance Resistencia al desgarro	Warp Urdimbire 412 N Weft Trama 347 N UNE EN ISO 13937-3:2001
Slippage Resistance Deslizamiento a la costura	Warp Urdimbire 5,0 mm 0.19" Weft Trama 3,0 mm 0.12" UNE EN ISO 13936-2:2004
Tensile Strength Resistencia a la tracción	Warp Urdimbire 2100 N Weft Trama 2800 N UNE EN ISO 13934-1:2013
Resistance to Pilling Resistencia al pilling	3-4/5 UNE EN ISO 12945-2:2001
Abrasion Resistance (Martindale) Resistencia a la abrasión (Martindale)	20000 UNE EN ISO 12497-2:2016
Shrinkage to Washing Encogimiento al lavado	Warp Urdimbire -1,5% Weft Trama 0% UNE EN ISO 5077:2007
Flammability Inflamabilidad	UNE 1021 PART 1 BS 5852-0 Cigarette Test Cal 117, NFPA 260
Cleaning Instructions Manutención	    

Sensitive values of tolerance +/- 5%. Valores susceptibles de tolerancia de +/- 5%


Uses Usos



Qualities Cualidades

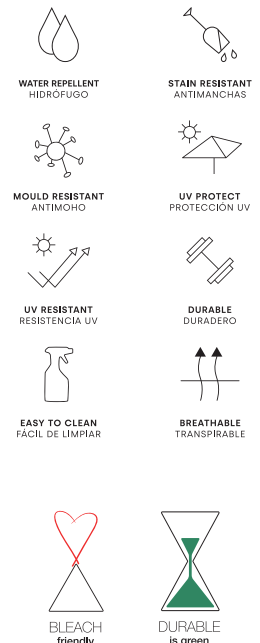

Optional Finishes Acabados opcionales



The Agora warranty covers the fabric becoming unserviceable as a result of loss of colour or strength from normal exposure conditions, including sunlight, mildew, rot and atmospheric chemicals, when properly installed, used and maintained. The warranty does not cover labour and installation costs supplied by the dealer. The warranty neither applies against deterioration of any kind due to abusive use, accidental burns, negligence or perforations. La garantía Agora cubre un anormal deterioro del tejido debido a la pérdida de color o resistencia siempre que existan unas condiciones de exposición normales, incluyendo el sol, moho, putrefacción y químicos de la atmósfera en general, siempre y cuando el tejido haya sido instalado, utilizado y mantenido correctamente. La garantía no cubre los trabajos de instalación del distribuidor. La garantía tampoco cubre, en cualquier caso, el deterioro debido al uso abusivo, quemaduras accidentales, negligencia o perforación.

